




KIA Carnival 2015, Ceramic Brake Pad, D1814, 58101-A9A00, F

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: ISO9000
- Model Number: ALL
- Minimum Order Quantity: 100
- Price: 5.00-25.00
- Packaging Details: export packing
- Delivery Time: 30-60
- Payment Terms: T/T, LC
- Supply Ability: 15 Million

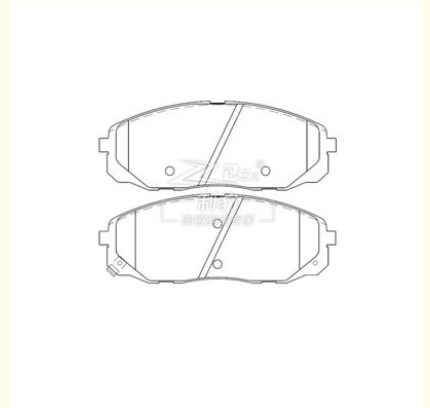

Product Specification

- Product Name: KIA Carnival Ceramic Brake Pad
- Model: Carnival 2015
- Type: Brake Pad
- Material: Ceramic
- Factory No.: ZK-21013
- F/R: F
- FMSI: D1814
- OEM: 58101-A9A00
- Braking System: N
- Highlight: **58101-a9a00 ceramic brake pad,**
58101-a9a00 ceramic brake pads

for more products please visit us on brakepadsset.com

Product Description

Specifications	
Product name	KIA Carnival Ceramic Brake Pad
Model	Carnival 2015
Type	Brake Pad
Material	Ceramic
F/R	F
Factory No.	ZK-21013
FMSI	D1814
OEM	58101-A9A00
Braking System	N
Size	
Width	161mm
Height	60.5mm
Thickness	16.3mm
Model_MARKE	Carnival 2015

Enhance Your Drive with Premium Ceramic Brake Pads for KIA Carnival 2015

Upgrade your KIA Carnival 2015's braking performance with our top-of-the-line ceramic brake pads. Our product, featuring the OEM part number **58101-A9A00** and model code **D1814**, is engineered for durability and superior stopping power.

Key Features:

Optimized Friction Formula: Experience a quieter, cleaner ride with reduced brake dust and minimal rotor wear.

Precision Fit: Designed to match the exact specifications of your KIA Carnival 2015, ensuring a seamless installation and optimal functionality.

Heat Resistant: Our ceramic pads withstand extreme temperatures, offering consistent performance and a longer lifespan.

Safety First: Rigorously tested to meet stringent safety standards, so you can drive with confidence.

Whether navigating city streets or embarking on long journeys, trust our ceramic brake pads to deliver a smooth, responsive braking experience every time.

Our ceramic brake pads, crafted from a specially formulated ceramic blend, showcase exceptional performance owing to their unique material composition.

The manufacturing process adheres to the rigorous standards of international certification IATF-16949, ensuring the utmost reliability in product quality.

Withstanding temperatures of up to 640°C, our ceramic brake pads offer a reliable safeguard for braking needs under diverse driving conditions.

Employing original high-precision molds and specialized heat treatment techniques, we guarantee the precision and stability of our products.

Addressing brake squeal concerns, our pads boast a friction coefficient of PS 0.35, coupled with heat resistance up to 640°C, maintaining outstanding braking performance even in high-temperature environments. This prolongs lifespan and effectively resolves brake squeal issues.

Prioritizing safety and comfort, our stable friction coefficient preserves brake disc integrity, while the comfortable pedal feel and low-noise design enhance driving pleasure and reduce environmental pollution.

Featuring unique chamfered edges, our pads not only reduce braking noise but also enhance compatibility with counterpart components, further elevating braking performance.

Exceptional heat dissipation performance is achieved through high-temperature and high-pressure burnishing, reducing bedding-in periods and minimizing noise occurrences, thereby enhancing pad cooling efficiency and ensuring braking stability and safety.

Designed for lightweight, our ceramic brake pads, compared to traditional metal ones, effectively reduce vehicle load, improving fuel economy and power performance.

Minimizing brake dust, our ceramic brake pads produce less dust compared to metal counterparts, making them environmentally friendly and less intrusive to the cleanliness of the vehicle surroundings and wheels.

Quality assurance is paramount to us. Through stringent quality controls and continuous research and development efforts, we ensure the stability and reliability of each ceramic brake pad, earning the trust and acclaim of our users.

